



OVEN

烤 爐
オーブン





OVEN REFERENCE



COMPACT CONVECTION RACK OVEN

迷你吹風轉爐 コンベクションオーブン



YR-1005



YR-1010

型號 Model		YR-1005	YR-1010
尺寸 Size (mm)	寬 Width	920	920
	深 Depth	1280	1280
	高 Height	860	1740
烤盤數量 Number of Trays		5# (400mm*600mm)	10 # (400mm*600mm)
烤盤架層間距 Tray Distance (mm)		90mm	90mm
電壓 Voltage (v)		380V (3P + N + PE)	380V (3P + N+ PE)
功率 Power (kw)		9.5	16
溫度 Temperature		0-300°C	0-300°
重量 Weight (kg)		225	320
進水壓力 Water Inlet Pressure		200-400Kpa	200-400Kpa
進水管 Water Inlet Hose		1/2" (4分管 Four-way Splitter)	1/2" (4分管 Four-way Splitter)

均勻烘烤 Bake Evenly

- 烤盤旋轉，風扇正反轉，對流風，確保烘焙效果均勻。
- 不必開門倒盤，避免溫度驟降，對烘焙品質提昇明顯。
- 每組程序5段烘焙，膨脹更充足，可實現自動蒸氣。
- The baking pan rotates, the fan operates in both forward and reverse modes, and the convection air ensures uniformly baked results.
- There's no need to open the door and flip the pan, preventing abrupt temperature drops and significantly enhancing the quality of baking.
- Each program consists of 5 stages of baking, resulting in more substantial expansion and enabling automatic steaming.

節能省電 Energy Saving

- 雙層熱反射玻璃門，內箱全焊接，減少熱量流失。
- 8cm+保溫層減少熱量散失，內置大理石蓄熱充足。
- PID侵犯溫控，節能程序加持，ECO時間可設定。
- Equipped with a double-layer heat-reflective glass door, the inner box is fully welded to minimize heat loss.
- Featuring an 8cm+ insulation layer that effectively reduces heat dissipation, with ample heat storage provided by the built-in marble.
- Utilizing PID intrusion temperature control and benefiting from an energy-saving program, the ECO time can be customized for added efficiency.

操作簡單 Easy to Use


- 60組五段快速烘焙程序。
- 16組程式快速記憶。
- 旋轉架可感應，方便清潔。
- Features 60 sets of five-stage rapid baking programs.
- Includes 16 sets of programs for quick and easy memory recall.
- The rotating stand is sensor-equipped, making it convenient for cleaning.

安全可靠 Safe and Reliable

- 旋轉結構具備支架功能，安全無憂。
- 採用加厚不鏽鋼，電器件ABB等進口配置。
- 電動電線，可自動洩壓，12V射燈色彩靚麗。
- The rotating structure is equipped with a bracket function, ensuring safety and peace of mind.
- Utilizes thickened stainless steel and imported configurations such as ABB electrical components.
- The electric wire includes automatic pressure relief and a vibrant 12V spotlight for beautiful colors.

品質提升 Quality Improvement

- 選配四檔風速。
- 客製化雷射商標
- 可選液晶面板，專業團隊設計外觀。
- Optional four-speed wind settings.
- Customizable laser logo.
- Choose the LCD panel option for a professionally designed appearance by our expert team.

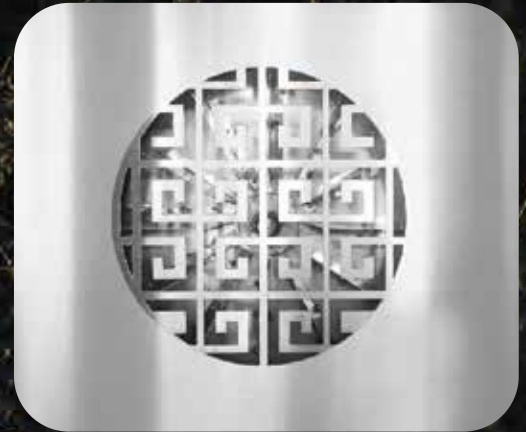

獨特出風口設計
Special vent design



可拆式內爐架
Detachable tray rack



四檔風速面板
Four-speed wind speed panel



EUROPEAN STYLE DECK OVEN

歐式層爐 ヨーロピアンデッキオーブン



YR-923



YR-943

型號 Model		YA-923	YA-933	YA-943
寬 Width		1155	1555	1555
尺寸 Size (mm)	深 Depth	1095	1095	1400
高 Height		1740	1740	1740
烤盤放置方式 Tray placement				
烤盤數量 Number of Trays		3層, 每層2盤 3 layers 6 trays	3層, 每層3盤 3 layers 9 trays	3層, 每層4盤 3 layers 12 trays
內高度 Inner Height (mm)		210	210	210
電壓 Voltage (v)		380V	380V	380V
功率 Power (kw)		11	16.5	20
溫度 Temperature		0-300°C	0-300°C	0-300°C
重量 Weight (kg)		450	600	750
標配 Standard		蒸汽裝置及石板 Steam device and Stone Plate		

性能優點 Performance and Advantages

- 每層10組加熱管按需分佈，上下獨立溫控，確保烘焙溫度均勻。
- 泰盛高階控制器，定時開關機，60組烘焙參數儲存，8組快速鍵。
- LOW-E玻璃視窗，進口電器件，加厚不鏽鋼。
- 單層可拆卸，加熱管單根可換。
- 聲音閃燈雙提示，警示時間可設定。
- 10cm保溫棉，內箱全焊接，避免熱量流失。
- 節能模式加持，ECO時間可設定。獨立式蒸氣組。
- 微電腦控溫，PID調節，智慧數顯，精確控制每一度溫差。
- Each layer features 10 sets of heating tubes distributed as needed, with independent temperature control for the upper and lower parts to ensure uniform baking temperatures.
- Equipped with a high-end controller from Tai Sheng, featuring timed power on/off, storage for 60 baking parameters, and 8 quick-access keys.
- Utilizes LOW-E glass windows, imported electrical components, and thickened stainless steel for durability.
- The single layer is detachable, and individual heating tubes are replaceable.
- Offers dual prompts through sound and flashing lights, with customizable alert times.
- Includes 10cm of insulation cotton, with a fully welded inner box to prevent heat loss.
- Energy-saving mode with customizable ECO time. Standalone steam unit.
- Microcomputer temperature control, PID adjustment, intelligent digital display, ensuring precise control of every degree of temperature difference.





ROLL-IN ROTARY OVEN

入車式旋轉烤爐 ロータリーオーブン




YS-S2



**15層入爐台車
15 Trays Bakery Trolley**

型號 Model	YS-S2 E / G
尺寸 Size (mm)	寬 Width 1620 深 Depth 1850 高 Height 2550
台車數量 Number of Trolley	1
烤盤數量 Number of Trays	20-30 trays
電壓 Voltage (v)	380V
功率 Power (kw)	電 Electricity 47 kW 煤氣 Gas 3kW
溫度 Temperature	0-300°C
重量 Weight (kg)	1060

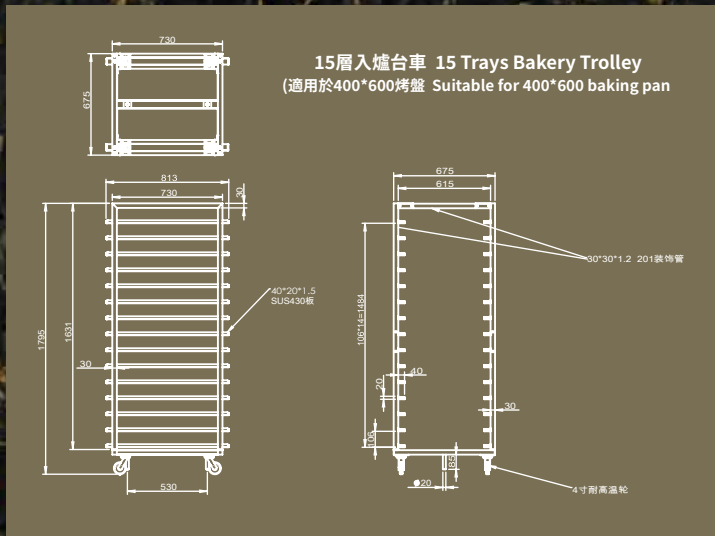

性能優點 Performance and Advantages

- 斜吹出風口, 風速柔和, 產品在烘焙過程中散發的水分相對要少, 產品膨脹相對大。
- 內箱全焊接, 10cm+保溫棉, 減少熱量流失。
- 正面採用雙層、爐門採用三層設計, 隔熱防燙
- 熱交換器採用最新的逆流式設計, 自有專利技術, 熱交換能力佳。
- 升溫速度快(17分鐘左右), 廢氣排放溫度低, 具有很好的節能效果。
- PID運算溫度控制, 節能程式加持, ECO時間可設定。
- 60組五段烘焙程序, 16程序組快速記憶。每組程序5段烘焙, 可實現自動蒸氣。
- 模組式設計, 整體結構緊湊, 佔地空間小。
- 蒸氣量大(200°C最多每次可以完全蒸發4.5-5.5公斤的水平)。
- 雙電氣系統, 電器件ABB等進口配置。
- 聲音燈光雙提示, 多台並排使用提示更明了。
- 可選液晶面板。
- 電器件封閉處理防蟲防鼠。
- Diagonally blows out the wind, with a gentle wind speed. The product releases relatively less moisture during the baking process, resulting in a larger product expansion.
- The inner box is fully welded with 10cm+ insulation cotton to reduce heat loss.
- The front adopts a double-layer design, and the furnace door is designed with three layers for insulation and burn prevention.
- The heat exchanger adopts the latest counterflow design with proprietary patented technology, providing excellent heat exchange capability.
- Fast heating speed (around 17 minutes), low exhaust emission temperature, and excellent energy-saving effects.
- PID operation temperature control with energy-saving program support; ECO time can be set.
- 60 sets of five-stage baking programs, with 16 program groups for quick memory. Each program consists of 5 stages of baking and can achieve automatic steam.
- Modular design, compact overall structure, and small footprint.
- Large steam capacity (up to 4.5-5.5 kilograms of water can be completely evaporated at 200°C each time).
- Dual electrical system with imported components such as ABB.
- Dual prompts with sound and light, providing clearer indications when used in multiple units side by side.
- Optional LCD panel.
- Sealed treatment of electrical components to prevent insects and rodents.



ELECTRIC CONVECTION OVEN

固定款電熱風爐 電気式コンベクションオーブン



WSK-705E
5盤電吹風爐
5 Trays Electric
Convection Oven



WSK-710E
10盤電吹風爐
10 Trays Electric
Convection Oven



WSK-705E+CCTH
10盤電吹風爐
10 Trays Electric
Convection Oven



WSK-705E+SK
5電吹風爐 + 單盤烤爐 + 14盤爐架
5 Trays Electric
Convection Oven with Stand

型號 Model		WSK-705E	WSK-710E
烤盤數量 Number of Trays		5	10
烤盤尺寸 Size of Trays		400*600	400*600
烤盤架層間距 Tray distance (mm)		90	90
尺寸 Size (mm)	寬 Width	780	780
	深 Depth	1253	1253
	高 Height	690	1710
功率 Power (kw)		9.8	19.5
電壓 Voltage (v)		380 / 220	380
重量 Weight (kg)		149	270
內腔板材 Interior Material		不銹鋼 Stainless steel	
外表面板材 Exterior Material		不銹鋼 Stainless steel	



ELECTRIC CONVECTION OVEN

固定款電熱風爐 電気式コンベクションオーブン



WSK-705E+R1
5盤電吹風爐 + 方管爐架
5 Trays Electric
Convection Oven with Stand



WSK-705E+901+CCTH
5電吹風爐 + 單盤烤爐 + 14盤醱酵櫃
5 Trays Electric Convection Oven
+ Deck Oven + Prover



WSK-705E+901+SK
5電吹風爐 + 單盤烤爐 + 14盤爐架
5 Trays Electric
Convection Oven with Stand



WSK-705E+FED-12B
5盤電吹風爐 + 12盤凍藏醱酵櫃
5 Trays Electric Convection Oven
with Prover



WSK-705E*2+R1
2台5盤電吹風爐 + 方管爐架
5 Trays Electric Convection
Oven x 2 with Stand



WSK-705E+901+FED-12B
5電吹風爐 + 單盤烤爐 + 12盤凍藏醱酵櫃
5 Trays Electric Convection Oven
+ Deck Oven + Retarder Prover



MINI ELECTRIC OVEN

迷你電烤爐 小型電気オーブン



WSK-901
普通款1層1盤小烤爐
(不能加蒸汽裝置)
Standard Mini Deck Oven



WEE
高級款1層1盤疊加
Advance Mini
Deck Oven



WEE*2
2台高級款1層1盤疊加
Advance Mini Deck
Oven x 2



WEE*2+MTH
2台高級款1層1盤 + 7盤醱酵櫃
Advance Mini Deck Oven
x 2 with Prover



WEE+MK
高級款1層1盤 + 爐架
Advance Mini Deck
Oven with Stand



WEE+MTH
高級款1層1盤 + 7盤醱酵櫃
Advance Mini Deck Oven
with Prover

型號 Model		WSK-901	WEE	MTH
烤盤數量 Number of Trays		1	1	7
烤盤尺寸 Size of Trays (mm)		400*600	400*600	400*600
烤盤放置方式 Tray Placement				
外表面尺寸 Exterior Size (mm)	寬 Width	780	730	730
	深 Depth	1000	880	800
	高 Height	360	530	845
內腔尺寸 Interior Size (mm)	寬 Width	420	430	-
	深 Depth	620	660	-
	高 Height	200	200	-
每層功率 Power per Deck (kw)		2.8	2.8	0.9
電壓 Voltage (v)		220	220	220
重量 Weight (kg)		60	70	80
溫度 Temperature		300°C	300°C	300°C
外表面板材 Exterior material		SUS430HL	SUS430HL	SUS430
備註 Remarks		WEE烤爐標配蒸汽裝置、可選配石板 (每層計算) WEE equipped steam device as standard, Stone plate can be added separately		



JAPANESE STYLE ELECTRIC OVEN

日式電烤爐 和風電気オーブン



JE21T-R

1層2盤電烤箱
2 Trays Electric Oven



JE21T-R

1層2盤電烤箱 + 爐架
2 Trays Electric Oven
with Stand



JE21T-R

2層4盤電烤箱 + 爐架
2 Trays Electric Oven x 2
with Stand

型號 Model		JE21T-R	JE21T-R+R	JE22T-R	JE22T-R+R
層數 Number of Layers		1	1	2	2
烤盤數量 Number of Trays		2	2	4	4
烤盤尺寸 Size of Tray (mm)		400*600	400*600	400*600	400*600
烤盤放置方式 Tray placement					
外表面尺寸 Exterior Size (mm)	寬 Width	1350	1350	1350	1350
	深 Depth	960	960	960	960
	高 Height	560	1320	1400	1640
內腔尺寸 Interior Size (mm)	寬 Width	850	850	850	850
	深 Depth	635	635	635	635
	高 Height	230	230	230	230
每層功率 Power per layer (kw)		5	5	10	10
電壓 Voltage (v)		220/380	220/380	380	380
重量 Weight (kg)		200	260	390	450
溫度 Temperature		300°C	300°C	300°C	300°C
外表面板材 Exterior material		SUS430HL	SUS430HL	SUS430HL	SUS430HL
可選配 Optional		蒸汽 Steam, 石板 Stone plate			



JAPANESE STYLE ELECTRIC OVEN

日式電烤爐 和風電気オーブン



JE23T-R

3層6盤電烤箱
2 Trays Electric Oven x3
with Stand



JE32T-R

2層6盤電烤箱
3 Trays Electric Oven x 2
with Stand

型號 Model		JE23T-R	JE32T-R	JE33T-R	JE42T-R
層數 Number of layers		3	2	3	2
烤盤數量 Number of Trays		6	6	9	8
烤盤尺寸 Size of Tray (mm)		400*600	400*600	400*600	400*600
烤盤放置方式 Tray Placement					
外表面尺寸 Exterior Size (mm)	寬 Width	1350	1720	1720	1350
	深 Depth	960	960	960	1570
	高 Height	1720	1400	1720	1400
內腔尺寸 Interior Size (mm)	寬 Width	850	1220	1220	850
	深 Depth	635	635	635	1235
	高 Height	230	230	230	230
總功率 Power per (kw)		15	12	18	14
電壓 Voltage (v)		380	380	380	380
重量 Weight (kg)		650	600	900	670
溫度 Temperature		300℃	300℃	300℃	300℃
外表面板材 Exterior material		SUS430HL	SUS430HL	SUS430HL	SUS430HL
可選配 Optional		蒸汽 Steam、石板 Stone plate			



JAPANESE STYLE ELECTRIC OVEN

日式電烤爐 和風電気オーブン



JE44YW-R

4層4盤電烤箱
4 Trays Electric Oven x4
with Stand



JE22T-NH-R

2層2盤電烤箱
2 Trays Electric Oven x3
with Stand

型號 Model		JE43T-R	JE42YW-R	JE43YW-R	JE63YW-R
層數 Number of layers		3	2	3	3
烤盤數量 Number of Trays		12	8	12	18
烤盤尺寸 Size of Tray (mm)		400*600	400*600	400*600	400*600
烤盤放置方式 Tray Placement					
外表面尺寸 Exterior Size (mm)	寬 Width	1350	1720	1720	1720
	深 Depth	1570	1240	1240	1570
	高 Height	1720	1720	1720	1720
內腔尺寸 Interior Size (mm)	寬 Width	850	1220	1220	1220
	深 Depth	1235	905	905	1235
	高 Height	200	200	200	200
總功率 Power per (kw)		21	14	21	27
電壓 Voltage (v)		380	380	380	380
重量 Weight (kg)		950	710	1100	1550
溫度 Temperature		300°C	300°C	300°C	300°C
外表面板材 Exterior material		SUS430HL	SUS430HL	SUS430HL	SUS430HL
可選配 Optional		蒸汽 Steam, 石板 Stone plate			